

IntraGen

Technical Specification


Applied Frequency	IntraGen : 6Mhz
RF Output Mode	Monopolar
RF Energy per Level	User Mode: 5Watt ~ 200Watt IntraGen Mode: T Level ~ 7Level
User Mode	ON TIME: 0.1s ~ 2.0s (0.01s unit) OFF TIME: 0.1s ~ 2.0s (0.01s unit) Number Of Pulses: 1 ~ 4 Watt: 5W ~ 200W (1W Unit)
Small Tip	7mm X 7mm (0.32cm)
Full Tip	15mm X 15mm (1.69cm²)
Output Switch	Handpiece Switch or Foot Switch

System Specification

Weight	28Kg
Dimensions	370mm x 450mm x 810mm (including stand 1,240mm)
Handpiece Hose Length	2.3M
Power Consumption	220V, 600VA (For Domestic Sales) 90V ~ 240V (Free Voltage), 600VA (For Overseas Sales)



Skinnovation Pvt. Ltd.
502 / 503, Shreya House, Pereira Hill Road, Off Andheri - Kurla Road, Opp Gurunanak Petrol Pump,
Andheri (E), Mumbai 400 093 | PH : 28246384, 28386327, Mob : +91 9769913008 | www.skinnovation.in

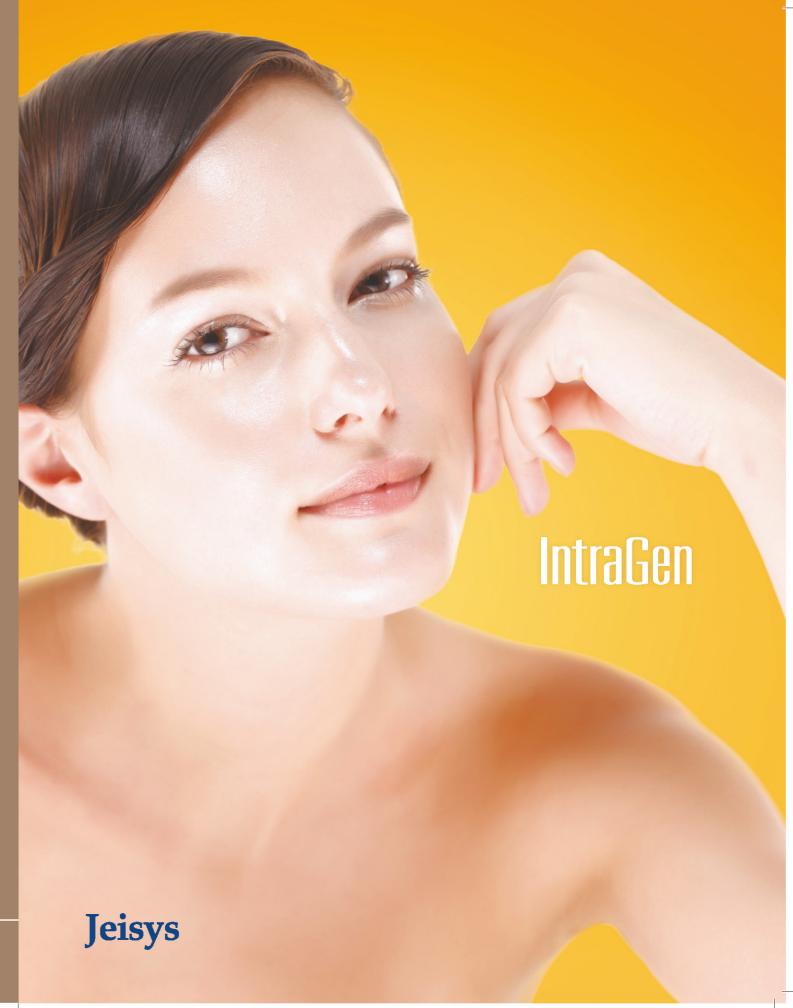



Real time Impedance **Feedback System**

Consistent energy emission to heat up dermal area

Constant and reliable treatment in any impedance value

IntraGen

IntraGen~











 $7_{mm} \times 7_{mm}$



Small Tip



Full Tip



Experience! Smart Grid RF*!